


TA 70A

Encapsulated 70A CT
for the Femto 70A and Atto 70A



70A external current transformer, grain oriented, with output in mV suitable for the Femto and Atto D4 70A. High accuracy also for low currents/powers. Perfect for applications measuring the consumption/production up to 6kW single phase or 18-20kW three phase systems. One TA 70A CT is already included in the Femto and Atto D4 70A packaging. If the system to be monitored is three phase type, 2 additional CT per instrument are necessary.

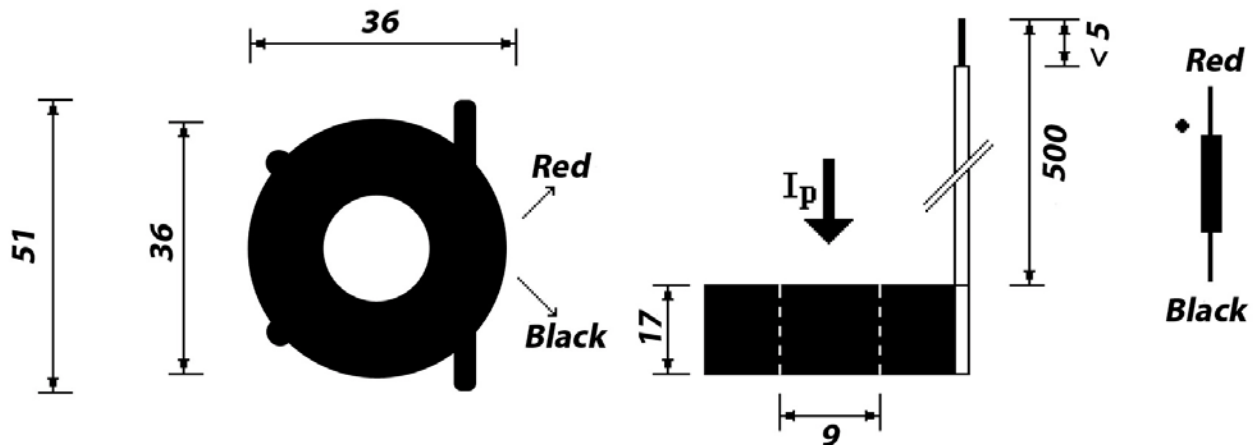

Misure in mm - Values in mm

Technical Specification

Accuracy1%
 Frequency50 - 60 Hz
 Spirals ratio(1) : 1000
 Load Resistance50 Ω
 Case / shieldplastic
 Hole diameter9 mm
 Built in red/black cable length.....500 mm
 Max distance between the CT and the meter.....500 mm

Code

Type	Code
TA 70A.....	PFAE000-00

Distributor