

Kilo & Kilo net



- ▶ High Performance (accuracy class 0,5S)
- ▶ Flexibility (open platform)
- ▶ Reliability (high quality of components)
- ▶ Connectivity (RS485, E-Wi, ExpBus, Ethernet, Wi-Fi, NFC)
- ▶ Continuous monitoring (E.g. ISO 50001)
- ▶ Energy efficiency (E.g. 2012-27 EU-Directive and the Energy Efficiency Certificates)

(Power Quality) Energy Analyzer & (Wi-Fi) Data Manager

Power Quality Energy Analyzer & (Wi-Fi) Web Data Manager

The **Kilo D6** is an Energy Analyzer & Data Manager microprocessor based (Dual Core Cortex-M4) outstanding flexibility and accuracy designed to meet the most demanding applications of monitoring of electrical parameters and electrical energy management in industrial, tertiary, commercial and residential sectors. The high accuracy class 0.5 S, for Active Energy, according to IEC 61000-4-30, in true-RMS, is obtained by continuously sampling the waveforms of voltages and currents with a very high resolution, thus ensuring the maximum accuracy even in the presence of rapidly varying loads in time (e.g. spot welding).

The **Kilo D6** is equipped with a slave Rs485 and an Ethernet (**Wi-Fi** option) port and, depending on the version, with an internal module for inputs/outputs, environmental sensors or E-Wi wireless networks. The **Kilo D6** is equipped with a 128 MB high capacity memory for implementing, through PUK codes, various features. Its architecture allows the firmware upload & update even remotely. The Kilo D6 is equipped as well with an expansion bus, ExpBus, for the connection of digital and analog inputs/outputs, environmental sensors modules and supports NFC(Near Field Communication).

The **Kilo D6 Q** is a Power Quality Energy Analyzer & Data Manager which in addition to the functions of the del Kilo D6 includes the management of the quality of the energy through the Ethernet port (or Wi-Fi). It includes also functions related to the EN 50160 normative (peaks, dips, interruptions, harmonics) and EN 61000-4-30 for Class S with graphic detail of the event, table and timeline of the events, measurement campaigns with selectable parameters and programmable sampling frequency.


The **Kilo net D6 Q** is a Power Quality Energy Analyzer & Web Data Manager, an open platform connected to the Ethernet / Internet via Rj45 (or Wi-Fi optional). it represents the starting point for the continuous monitoring of the energy efficiency through the measurement and management of the energy parameters (electricity, gas, water, etc.), environmental parameters (temperature, luminosity, CO2, etc.) and process parameters. It includes the **Kilo D6 Q** device for the measurement of electrical parameters and quality of energy, a Web and FTP Server, and communicates with / manages the other Electrex devices via the RS485 master port, the ExpBus, the E-Wi coordinator (and other bus types). The Wi-Fi option permits to manage / display the data from any device having a browser (PC, Smartphone, tablet, etc.) allowing also a rapid connection through NFC enabled devices.

Semplicity

The **Kilo D6** is equipped with a FSTN dot matrix display with high contrast, back-lighted, white LEDs allowing the simultaneous displaying of 4 measurements and of their identification symbol with high visibility characters.



The 6 keys keypad Joystick positioned and menu list type on the display for configuration provide a simple and rational use of the instrument, while the default page displayed when powering on is user definable. On the front panel 2 calibration and control LEDs pulse with a frequency proportional to the imported Active and Reactive Energy for the on-field calibration with optical devices. The red

LED pulsing under the  symbol by the Electrex logo indicates the functioning state. 2 additional LEDs positioned under the white band report instead the activity on the RS485 port. While for the Rj45 port the 2 built-in LEDs will indicate the Ethernet activity. In order to reduce the energy consumption it is possible to configure the display's back-lighting, the state LED and the ones related to the RS485 port.

Versatility

The measuring device internal to the **Kilo D6** is suitable for virtually all type of electrical grid systems, single phase, bi-phase, three phase 3- and 4-wire, symmetrical and asymmetrical, balanced or unbalanced, Low Tension, with 1, 2 or 3 CTs as well as for 2 and 4 quadrant (import/export) measurement. A simple configuration from the keyboard (or via our Energy Brain software) allows to configure all the operating parameters like network type, CT and VT (if present) ratio, integration time (1-60m) and alarms (threshold, delay, hysteresis), digital outputs and configuration parameters related to optional modules connected.

Measures

Parameters	Type	L1	L2	L3	n	Σ	P	Range
Voltage	U _{L-N}	•	•	•	•	•	•	20,0V...400 kV
	U _{L-L}	•	•	•	•	•	•	
	U _{L-N} MAX	•	•	•	•	•	•	
	U _{L-L} MAX	•	•	•	•	•	•	
	U _{L-N} MIN	•	•	•	•	•	•	
	U _{L-L} MIN	•	•	•	•	•	•	
Current	I	•	•	•	•	•	•	10 mA...10,0 kA Electrex Flexible CT(7): 1A ... (5A - 500A) 4A ... (20A - 2000A) 16A ... (80A - 8000A)
	I _{MAX}	•	•	•	•	•	•	
	I _{AVG} THERM (1)	•	•	•	•	•	•	
	I _{MD} THERM (1)	•	•	•	•	•	•	
Power Factor	PF	•	•	•	•	•	•	0,00ind...1,00...0,00cap
Frequency	F	•	•	•	•	•	•	45 ... 65 Hz
Harmonic Distortion	THD-U _{L-N}	•	•	•	•	•	•	0...199,9%
	THD-U _{L-L}	•	•	•	•	•	•	
	THD-I	•	•	•	•	•	•	
Active Power	P	•	•	•	•	•	•	± 0,00...1999 MW
	P _{AVG} (2)	•	•	•	•	•	•	
	P _{MD} (2)	•	•	•	•	•	•	
	P _{MAX} (3)	•	•	•	•	•	•	
Reactive Power	Q _{IND}	•	•	•	•	•	•	± 0,00...1999 Mvar
	Q _{CAP}	•	•	•	•	•	•	
	Q _{AVG} IND (2)	•	•	•	•	•	•	
	Q _{AVG} CAP (2)	•	•	•	•	•	•	
	Q _{MD} IND (2)	•	•	•	•	•	•	
	Q _{MD} CAP (2)	•	•	•	•	•	•	
Apparent Power	S	•	•	•	•	•	•	± 0,00...1999 MVA
	S _{AVG} (2)	•	•	•	•	•	•	
	S _{MD} (2)	•	•	•	•	•	•	
Life Time	h, h/100	•	•	•	•	•	•	0,01...99.999,99 hours
Active Energy	E _a IMP (5)	•	•	•	•	•	•	0,1 kWh...100 GWh
	E _a EXP (5)	•	•	•	•	•	•	
Reactive Energy	E _r IND IMP (5)	•	•	•	•	•	•	0,1 kvarh...100 Gvarh
	E _r CAP IMP (5)	•	•	•	•	•	•	
	E _r IND EXP (5)	•	•	•	•	•	•	
	E _r CAP EXP (5)	•	•	•	•	•	•	
Apparent Energy	E _s IMP (5)	•	•	•	•	•	•	0,1kVAh...100 GVAh
	E _s EXP (5)	•	•	•	•	•	•	
Pulse Counter	CNT	•	•	•	•	•	•	
Analog Measure	(6)	•	•	•	•	•	•	

For all the "instantaneous measures": mean over 10 cycles - example: 200ms at 50Hz.

- (1) Mean value (rolling average) over the integration time (1.. 60 min. program.) and peak (MD).
- (2) Average value (moving average) in both import and export over the integration time (1..60 min programmable) and peak (MD) that is the maximum average value.
- (3) Maximum Power values for both import and export.
- (4) Non resettable total lifetime counter. 3 partial lifetime counters.
- (5) Import/Export energies displayed as 9 digits in floating-point readings; internal energy counters are logged with a 64 bit resolution which assures a minimum definition of 0,1 Wh and a max count of 100 GWh
- (6) Only for versions with digital and analog inputs.
With Flexible Electrex CT, accuracy Class 1 for both the devices, within the current ranges denoted above with brackets.

Kilo D6 : Single Harmonic

Parameters		L1	L2	L3	Σ	Management
Harmonics analysis (7)	H Voltage	•	•	•	•	Value (H01), % (H02-H51)
	H Current	•	•	•	•	Value (H01), % (H02-H51)
	H Power & dir.	•	•	•	•	Value (H01), % (H02-H51)

(7) FFT method calculation of the harmonics, amplitude and phase, up to the 51-st for the 3 voltages and currents per each phase, 3 active powers of each phase with direction (accumulated in 10 periods).

Kilo D6 Q: Events U and I, measurement campaign

Parameters (8)	(9) (10)	L1	L2	L3	Σ	Management
Dips and peaks.	•	•	•	•	•	Events logged in the internal memory with time-stamp
Overvoltage and overcurrent	•	•	•	•	•	
Sags and interruptions	•	•	•	•	•	

- (8) Event logging with date and time, duration, max/min value. Programmable thresholds. EN 50160 and EN 61000-4-30.
- (9) Event's graphic detail: nr. of samples (programmable e.g. 1 second) retrieved previously and after the event (dips, peaks and interruptions).
- (10) Distribution table of the events based on the threshold exceeded and duration following UNIPEDA (<http://www.eurelectric.org/>) and Timeline of the events.
- (11) Programmable measurement campaigns (choice of parameters and of the sampling time). See Memory Management section.

Harmonics up to the 51-st order

The **Kilo D6** displays also the single harmonics up to the 51-st order for the 3 voltages and currents per each phase, 3 active powers of each phase with the sign (+or -) that denotes the direction of the harmonic. FFT method calculation of the harmonics, for amplitude and phase.

Phase sequence

The **Kilo D6** the identification of the correct phase sequence.

Ethernet port and/or serial RS485

The **Kilo D6** is equipped with a 10/100 Base-TX (RJ45) Auto-MDIX **Ethernet port** for the "http" communications (real-time measurements and memory logs) and "Modbus over IP" (real-time measurements). It is equipped also with a serial RS485 slave port, protected against overvoltage, using Modbus-RTU "full compliant" (instantaneous measurements). The data are read as numerical registers composed by mantissa and exponent in the IEEE format. The communication speed of the RS485 port is configurable, up to 38.400 bps, with a max. 125 registers requested (equivalent to 62 parameters) with no waiting time between two requests.

Kilo D6 versions

The **Kilo D6** is available in various versions:

- **Basic** without inputs or outputs
- **1DI 2DO** with 1 digital input and 2 digital outputs
- **1DI 2DO Self-Powered** with 1 self powered digital input and outputs rated at 250V 100mA
- **2AO4-20mA** with 2 analog 4-20mA outputs (external power supply for resistances > 250 ohm needed)
- **2DI 1RO** with 2 digital inputs and 1 relay output
- **2RO** with 2 relay outputs
- **4DI** with 4 digital inputs
- **4DO** with 4 digital outputs
- **2DI 2DO** with 2 digital inputs and 2 digital outputs
- **4AI** with 4 analog inputs 0÷10V (4-20mA)
- **I2C** for environmental param. sensors (T, H, L, P, etc)
- **E-Wi** for wireless comm. using E-Wi protocol

Digital Inputs

Kilo D6 .. 1DI or 2DI or 4DI is equipped with an optically insulated digital input complete with programmable filter for input glitches. The digital input is set to operate for external pulse count of, example, water meters, gas meters (insulation to meet the ATEX requirements), water meters, quantity count, etc. Other user selectable operative modes are ON/OFF state input (example for reading the ON/OFF state of machines and switches) and tariff change input (example for day-night tariff changeover). The digital input requires an external 10-30Vdc power supply.

Kilo D6 1DI 2DO Self-Powered and **Kilo D6 2DI 1RO Self-Powered** instead are provided with a self powered digital input.

Analog Inputs

The **Kilo D6 4AI** is equipped with 4 analog inputs rated at -10÷10V (compatible with 0÷10V, 0÷5V, -5÷5V, 4÷20mA at 200 ohm).

Digital Outputs

The **Kilo D6 .. 2DO or 4DO** are equipped with two optically insulated transistor outputs rated 27 Vdc 27 mA per DIN 43864 standards. The two outputs may be set for the transmission of pulses or alternatively configured as outputs of the internal alarms (see Alarms) or as remote output devices controlled via serial line and Modbus commands.

The **Kilo D6 1DI 2DO Self-Powered** instead is provided with two optomios outputs rated at max. 250V or 100mA AC/DC.

Relay Output

The **Kilo D6 2DI 1RO Self-Powered** and the **Kilo D6** are equipped with one or two relay outputs with changeover contact rated at max 30V max 2A (resistive load).

Power quality energy analyzer & web data manager

the reconstruction of the load chart and study the trend of withdrawals / inputs (downloadable via RJ45 port / Ethernet).

Alarms

The **Kilo D6** .. **2DO** or **4DO** or **1RO** or **2RO** are equipped with outputs programmable as alarms. Each alarm is associated to any of the parameters available, for example, either as a minimum alarm and / or as a maximum. All alarm outputs can also refer to the same parameter For having more alarm thresholds. You can set the delay of activation of each alarm (1-99 sec.), the hysteresis (in% of the threshold value) and the polarity of the output contacts (NO, NC). The alarm status is always available on the serial line (via Modbus "coils"). Because of the many combinations available only part of the alarm is programmable from the keyboard while they are completely Web Page or through the Energy Brain software or by "holding registers" of the Modbus protocol.

Analog Outputs 4-20mA

The **Kilo D6 2AO4-20mA** is equipped with 2 galvanic insulated analogue outputs 4-20 mA or 0-20 mA providing an extremely high accuracy and signal stability. The outputs are active for resistor loads up to 250 ohm, for higher loads an external power supply (12Vdc) will be needed (up to 750 ohm). The outputs ensure a response time of max. 200 ms. Each output is associated to any of the parameters.

I2C Bus

The **Kilo I2C** is equipped with an I2C Bus for connecting up to 4 sensors (up to 4 for the temperature or up to 1 for the temperature, 1 for the humidity, 1 for the luminosity and 1 for the air pressure). The max total distance of the I2C bus is 20 m.

E-Wi

The **Kilo D6 E-Wi** has the same features of the Kilo D6 with no inputs or outputs and in addition **transceives all the data, without any limit**, at 250kbps with a frequency of 2.4 GHz at a distance, without signal boosting and can reach up to 800 m in open field.

The E-Wi versions use the E-Wi protocol based on IEEE 802.15.4 and transmit to the E-Wi Coordinator, in addition to the measures, also the quality and intensity of the signal in order to facilitate the adjustment of the correct level of communication.

Wi-Fi Ethernet

The **Kilo Wi-Fi D6** is a version of the Kilo D6 using an existing Wi-Fi network for communicating with other devices.

The Kilo F version for Electrex Flexible CTs

The **Kilo F D6** is equipped with exclusive current inputs for the Electrex Flexible CTs (mV output and appropriate internal linearization in order to enhance accuracy).

ATTENTION: do not connect in these current inputs, CT with current output (e.g. ..1A o ..5A) otherwise both, the Kilo F D6 and the CT, will be damaged.

The full scale can be set among 500A, 2000A and 8000A. Class 1 of accuracy for both (device + flexible CTs) between the full scale current and 1/100 of the same value. Minimum current measurable: 1/500 of the selected full scale value.



FCTS 040-500 Flessibile split CT, internal diameter: 4 cm



FCTS 100-1000 Flessibile split CT, internal diameter: 10 cm

FCTS 200-2000 Flessibile split CT, internal diameter: 20 cm

FCTS 280-1000 Flessibile split CT, internal diameter: 28 cm

Load curves and data of consumption / production

The **Kilo D6** continuously logs the data of consumption / production and power by organizing them into separate daily files, each of which contains all the information necessary for

Astronomical Clock Calendar

The **Kilo D6** is equipped with a clock / calendar with astronomical real time management of the Coordinated Universal Time (UTC). It manages also the rules for the automatic switching from Standard Time at summer time (Daylight Saving Time) and vice versa. Automatic synchronization via NTP.



09:48
Tue 17/06/2014


System clock	
UTC time	Tue 17 Jun 2014 07:48:03
Local time	Tue 17 Jun 2014 09:48:03
UTC offset	+01:00
DST offset	+01:00
Next DST change	Sun 26 Oct 2014 03:00:00
NTP synchronization state	Synced!
Next NTP synchronization	Mon 23 Jun 2014 14:56:26

Battery powered Astronomical Clock Calendar

Tariffs

The **Kilo D6** can manage the most complexed tariffs, up to 8 tariffs with a max of 12 tariff changing per day.

The data provided include the energy consumption (Ea, Er, Es) and the max demand (peak) values (P_{MD}, Q_{MD}, S_{MD}) on all the 4 quadrants; total values and per each of the 8 tariffs therefore a total of 64 counters of energy and 64 power peak values. In case of only-import measurements and of a lower number of tariffs the device will update only the involved counters. All the measures related to each tariff can be available on the display and on the serial line. The management of the tariffs requires the upload of a customized calendar file generated with the software Energy Brain.

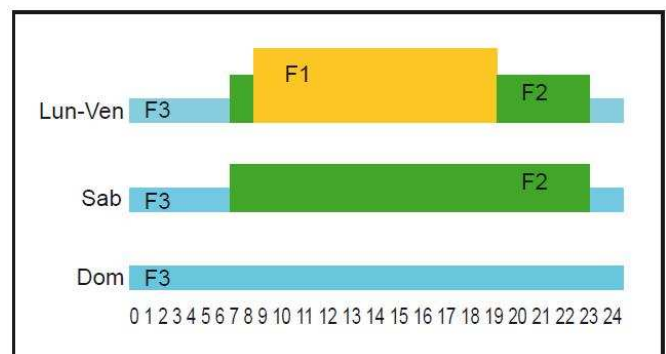

Example of a 3 Tariffs system



Firmware and Special versions on request

The **Kilo D6** firmware is upgradeable, remotely, at any time, in order to add and/or replace the existing characteristics with new and different functions.

Expansions via ExpBus

The **Kilo D6** is an evolutionary instrument capable to be adapted to the needs of the customer, even after it has been installed.

The system architecture is designed to allow the implementation on the field of hardware expansions thanks to the ExpBus, providing therefore to the customers the ability to modulate the investment and / or to respond to new needs.



UTP cable for the ExpBus (max 10m)	
VDC	Blue
Exp L	White & Blue
Exp H	Brown
GND	White & Brown

ExpBus

The **ExpBus**, configurable via the Ethernet port from Web pages:

- allows a multicast communication to 250kb/sec with collision management
- has a maximum length of 10 meters
- manages up to 8 nodes (modules) but technically it can manage up to 126

The connecting cable is a UTP where 4 wires are used:
2 for the power supply at 9 Vdc
2 for the bidirectional communication

The modules power the ExpBus

The cable must be connected in the in-out modality (multidrop) as for the RS485 Bus.

The **Kilo D6** manages up to 8 ExpBus Modules.



ExpBus Module suitable for the Kilo D6 e Kilo net D6 family

ExpBus Module D2

The *ExpBus Module D2* must be used with an external power supply of 24Vdc (e.g. Switching Power Supply D1 24VDC 400mA code PFTP100-Q2) and can contain up to 2 modules similar to the one shown here at the (of which, however, only one of the two types can be self powered, therefore only one for 1DI 2DO Self-Powered or 2AO4-20mA or 2DI 1RO Self Powered). Max. weight 45 gr.



When the ExpBus Module D2 is connected, the Kilo D6 recognizes it and allows you to configure it via Web page.

Tipi di schede interne per ExpBus Module D2 e D4

- **1DI 2DO**: 1 digital input and 2 digital outputs;
- **1DI 2DO Self-Powered**: 1 self powered digital input and 2 digital outputs;
- **2AO 4-20mA**: 2 analog self-powered 4-20mA outputs for loads up to 250 ohm, power supply needed for higher loads;
- **2DI 1RO Self-Powered**: 2 self-powered digital inputs and 1 relay output rated at 30V 2A (resistive load);
- **2 RO**: 2 relay output rated at 30V 2A (resistive load);
- **4DI**: 4 digital inputs;
- **4DO**: 4 digital outputs;
- **2DI 2DO**: 2 digital inputs and 2 digital outputs;
- **4AI**: 4 analog inputs -10÷10V (compatible with 0÷10V, 0÷5V, -5÷5V, 4÷20mA);
- **I2C**: for connecting environmental sensors Deca Sensor Bus Unit Box (T, TH, TL, THL, THLB, L, B, up to 4 T)
- **E-Wi**: for communicating in the wireless E-Wi network

ExpBus Module D4

The ExpBus Module D4 have a built-in 230Vac power supply (24Vdc power supply version on request) and can contain up to 2 modules, also self-powered.
Max. weight 100 gr.



When the ExpBus Module D4 is connected, the Kilo D6 recognizes it and allows you to configure it via Web page.


UTP cable for the I2C Bus (max 20m)	
VCC	Orange
SCL	White Orange
SDA	Green
GND	White Green

Memory management (via Ethernet port or Wi-Fi)

The **Kilo D6** family of devices manages the 128 MB flash memory in a flexible way for the storing of the different log services and event logs. Each log service can contain a maximum of 255 files and is characterized by a predetermined sampling frequency. The number of channels (e.g. instruments) that can be stored for each service depends on the activation PUKs and the amount of free memory. In the Kilo D6 Q version the memory is also used for log of events and for the measurement campaigns. In the same memory are hosted also the web pages for the configuration and display of measures (standard and customized). The memory can be read from **Ethernet port or Wi-Fi** network using the Energy Brain software and / or the HTTP protocol.



LOGGED PARAMETERS PROFILE CHARTS

The **Kilo D6** continuously logs the data on the consumption/production in daily files containing by default the 96 quarters of hour. The data logged can be displayed on the chart on a daily, weekly, monthly and yearly basis.

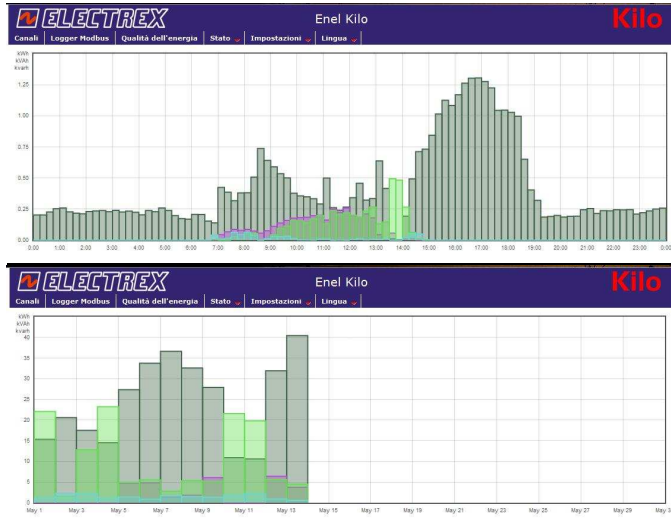

EVENT'S GRAPHIC DETAIL

The **Kilo D6 Q** includes the functionality named "event's graphic detail" that allows to record and display the trends of the beginning and end of the event with a time frame (for both beginning and end) of a second (programmable).

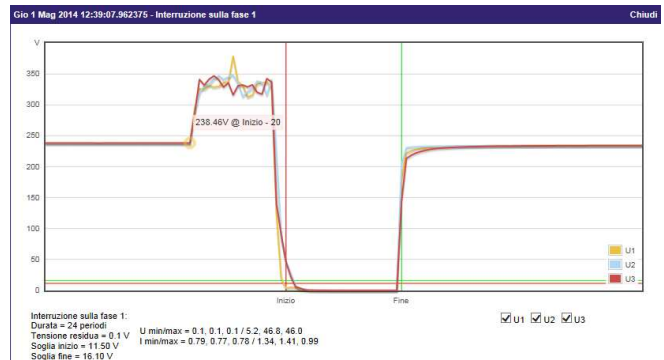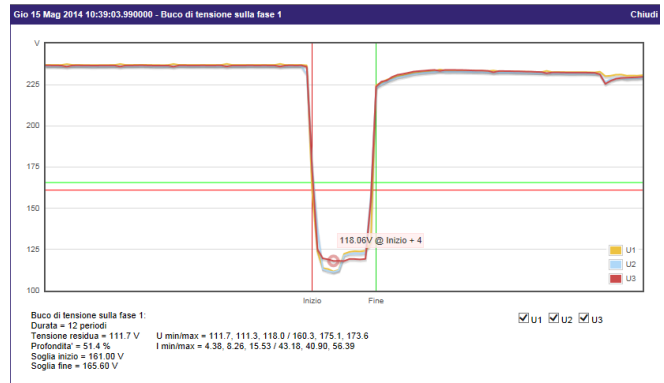

POWER QUALITY (Class S - EN 61000-4-30): Events Log

The **Kilo D6 Q** detects and logs various events with a resolution of one cycle (with date / time * of each event, type of event, phase involved, duration, min / max value reached during the event and UNIPEDA classification) useful for monitoring the quality of energy (functions related also to the EN 50160 and EN 61000-4-30 standards for the S class). Event types:

- Voltage Dip
- Voltage Swell
- Over current and its direction
- Interruption


Example:

Data/ora	Evento	Fase	Durata [oncus.us]	Durata [periodi]	Valore [V]	Classificazione UNIPEDA
2014-05-12 16:15:10.986375	Avvio logger	---	---	---	---	-
2014-05-14 12:34:37.353875	Sovrattensione	1	0:00:00.440250	22	363.6	S1
2014-05-14 12:34:37.353875	Sovrattensione	2	0:00:00.440250	22	357.6	S1
2014-05-14 12:34:37.353875	Sovrattensione	3	0:00:00.440250	22	366.0	S1
2014-05-14 12:34:37.854250	Buco di tensione	1	0:00:00.360125	18	0.2	X2
2014-05-14 12:34:37.854250	Buco di tensione	2	0:00:00.380250	19	0.3	X2
2014-05-14 12:34:37.874250	Buco di tensione	3	0:00:00.360250	18	0.2	X2
2014-05-14 12:34:38.054375	Interruzione	3	0:00:00.160000	8	0.2	-
2014-05-14 12:34:38.074375	Interruzione	1	0:00:00.140000	7	0.2	-
2014-05-14 12:34:38.074375	Interruzione	2	0:00:00.140000	7	0.3	-
2014-05-15 10:39:03.990000	Buco di tensione	1	0:00:00.240125	12	111.7	C2
2014-05-15 10:39:04.010000	Buco di tensione	2	0:00:00.220125	11	111.3	C2

(* Date/hour expressed in hours, minutes, seconds and milliseconds referring to the instruments' (local) time). In the table are displayed also some functioning logs as the ones related with the start and configuration settings.

EVENTS TIMELINE AND THE UNIPEDE TABLE

The **Kilo D6 Q** can display a timeline of the succession of events

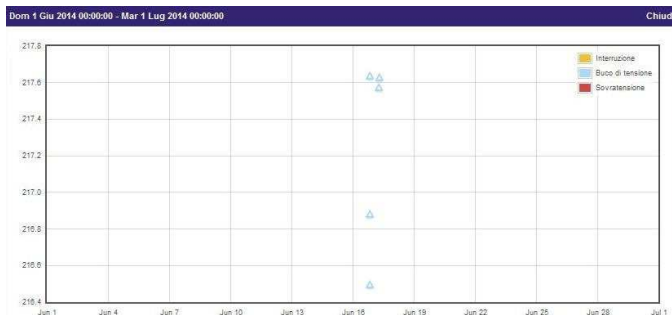

and maintains a diagram of distribution of events based on the percentage of the parameter considered in relation to its reference value and duration according to the dictates of UNIPEDE (International Union of Producers and Distributors of Energy - <http://www.eurelectric.org/>).

Classificazione eventi

Tabella UNIPEDE (classificazione per valore e durata)

Tensione residua u [%]		Durata t [ms]				
		1 10 <= t <= 200	2 200 < t <= 500	3 500 < t <= 1000	4 1000 < t <= 5000	5 5000 < t <= 60000
A	90 > u >= 80	0	0	0	0	0
B	80 > u >= 70	0	0	0	0	0
C	70 > u >= 40	0	3	0	0	0
D	40 > u >= 5	0	0	0	0	0
X	5 > u	0	7	2	0	0

Sovraelevazione di tensione u [%]		Durata t [ms]		
		1 10 <= t <= 500	2 500 < t <= 5000	3 5000 < t <= 60000
S	u >= 120	9	0	0
T	120 > u >= 110	0	0	0

Example: in the last column of the table here below , the S1 denotes a Voltage Swell with a duration between 10 and 500 mS (refer to the UNIPEDE table above), while the X2 denotes a Voltage Dip lower than 5% of the nominal voltage value with a duration between the 10 and 200 mS (refer to the UNIPEDE table above).


Data/ora	Evento	Fase	Durata (omiss.us)	Durata (period)	Valore (V)	Classificazione UNIPEDE
2014-05-12 16:15:10.986375	Avvio logger	---	---	---	---	-
2014-05-14 12:34:37.353875	Sovratensione	1	0:00:00.440250	22	363.6	S1
2014-05-14 12:34:37.353875	Sovratensione	2	0:00:00.440250	22	357.6	S1
2014-05-14 12:34:37.353875	Sovratensione	3	0:00:00.440250	22	366.0	S1
2014-05-14 12:34:37.854250	Buco di tensione	1	0:00:00.360125	18	0.2	X2
2014-05-14 12:34:37.854250	Buco di tensione	2	0:00:00.380250	19	0.3	X2
2014-05-14 12:34:37.874250	Buco di tensione	3	0:00:00.360250	18	0.2	X2
2014-05-14 12:34:38.054375	Interruzione	3	0:00:00.160000	8	0.2	-
2014-05-14 12:34:38.074375	Interruzione	1	0:00:00.140000	7	0.2	-
2014-05-14 12:34:38.074375	Interruzione	2	0:00:00.140000	7	0.3	-
2014-05-15 10:39:03.990000	Buco di tensione	1	0:00:00.240125	12	111.7	C2
2014-05-15 10:39:04.010000	Buco di tensione	2	0:00:00.220125	11	111.3	C2

Elementi: 33

MEASUREMENT CAMPAIGN

In the **Kilo D6 Q** it is possible to configure the measurement campaign in order to log in the built-in memory the various parameters with a programmable sampling frequency, for example every 2 min. for 60 days (FIFO) in daily files.

Example of a daily measurement campaign of the 3 phase-voltages every 15 seconds:

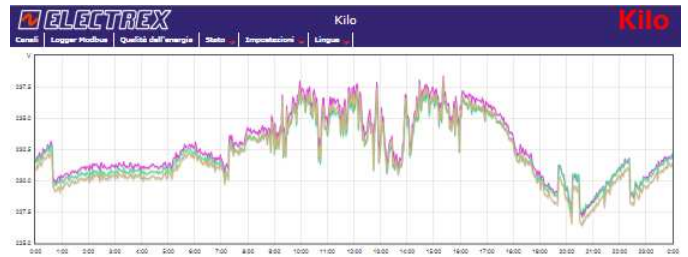

Logger Modbus

Servizio: Service S


Visualizza da: 2014-05-15 00:00

Intervallo: Giorni

Aggiorna

Kilo (ind. 27)

- THD U1N (%)
- THD U2N (%)
- THD U3N (%)
- THD U1S (%)
- THD U2S (%)
- THD U3S (%)
- THD I1 (%)
- THD I2 (%)
- THD I3 (%)
- U1 - Ampiezza H3 (V)
- U1 - Ampiezza H4 (V)
- U1 - Ampiezza H5 (V)
- U1 - Ampiezza H6 (V)
- U1 - Ampiezza H7 (V)
- U1 - Ampiezza H8 (V)
- U1 - Ampiezza H9 (V)
- U1 - Ampiezza H10 (V)
- U1 - Ampiezza H11 (V)
- U1 - Ampiezza H12 (V)
- U1 - Ampiezza H13 (V)
- U1 - Ampiezza H14 (V)
- U1 - Ampiezza H15 (V)
- U1 - Ampiezza H16 (V)
- U1 - Ampiezza H17 (V)
- U1 - Ampiezza H18 (V)
- U1 - Ampiezza H19 (V)
- U1 - Ampiezza H20 (V)
- U1 - Ampiezza H21 (V)
- U1 - Ampiezza H22 (V)
- U1 - Ampiezza H23 (V)
- U1 - Ampiezza H24 (V)
- U1 - Ampiezza H25 (V)
- U1 - Ampiezza H26 (V)
- U1 - Ampiezza H27 (V)
- U1 - Ampiezza H28 (V)
- U1 - Ampiezza H29 (V)
- U1 - Ampiezza H30 (V)
- U1 - Ampiezza H31 (V)
- U1 - Ampiezza H32 (V)
- U1 - Ampiezza H33 (V)
- U1 - Ampiezza H34 (V)
- U1 - Ampiezza H35 (V)
- U1 - Ampiezza H36 (V)
- U1 - Ampiezza H37 (V)
- U1 - Ampiezza H38 (V)
- U1 - Ampiezza H39 (V)
- U1 - Ampiezza H40 (V)
- U1 - Ampiezza H41 (V)
- U1 - Ampiezza H42 (V)
- U1 - Ampiezza H43 (V)
- U1 - Ampiezza H44 (V)
- U1 - Ampiezza H45 (V)
- U1 - Ampiezza H46 (V)
- U1 - Ampiezza H47 (V)
- U1 - Ampiezza H48 (V)
- U1 - Ampiezza H49 (V)
- U1 - Ampiezza H50 (V)
- U1 - Ampiezza H51 (V)
- U1 - Ampiezza H52 (V)
- U1 - Ampiezza H53 (V)
- U1 - Ampiezza H54 (V)
- U1 - Ampiezza H55 (V)
- U1 - Ampiezza H56 (V)
- U1 - Ampiezza H57 (V)
- U1 - Ampiezza H58 (V)
- U1 - Ampiezza H59 (V)
- U1 - Ampiezza H60 (V)
- U1 - Ampiezza H61 (V)
- U1 - Ampiezza H62 (V)
- U1 - Ampiezza H63 (V)
- U1 - Ampiezza H64 (V)
- U1 - Ampiezza H65 (V)
- U1 - Ampiezza H66 (V)
- U1 - Ampiezza H67 (V)
- U1 - Ampiezza H68 (V)
- U1 - Ampiezza H69 (V)
- U1 - Ampiezza H70 (V)
- U1 - Ampiezza H71 (V)
- U1 - Ampiezza H72 (V)
- U1 - Ampiezza H73 (V)
- U1 - Ampiezza H74 (V)
- U1 - Ampiezza H75 (V)
- U1 - Ampiezza H76 (V)
- U1 - Ampiezza H77 (V)
- U1 - Ampiezza H78 (V)
- U1 - Ampiezza H79 (V)
- U1 - Ampiezza H80 (V)
- U1 - Ampiezza H81 (V)
- U1 - Ampiezza H82 (V)
- U1 - Ampiezza H83 (V)
- U1 - Ampiezza H84 (V)
- U1 - Ampiezza H85 (V)
- U1 - Ampiezza H86 (V)
- U1 - Ampiezza H87 (V)
- U1 - Ampiezza H88 (V)
- U1 - Ampiezza H89 (V)
- U1 - Ampiezza H90 (V)
- U1 - Ampiezza H91 (V)
- U1 - Ampiezza H92 (V)
- U1 - Ampiezza H93 (V)
- U1 - Ampiezza H94 (V)
- U1 - Ampiezza H95 (V)
- U1 - Ampiezza H96 (V)
- U1 - Ampiezza H97 (V)
- U1 - Ampiezza H98 (V)
- U1 - Ampiezza H99 (V)
- U1 - Ampiezza H100 (V)

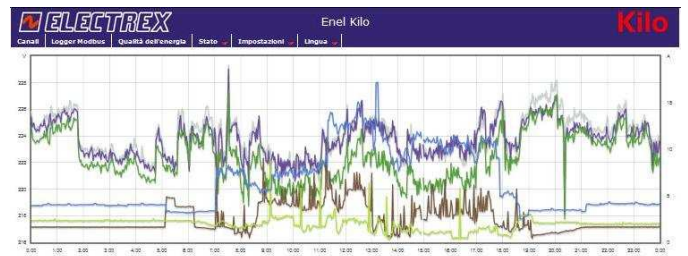

Logger Modbus

Servizio: Service S

Visualizza da: 2014-05-16 00:00

Intervallo: Giorni

Aggiorna

Enel Kilo (ind. 28)

- THD U1N (%)
- THD U2N (%)
- THD U3N (%)
- THD U1S (%)
- THD U2S (%)
- THD U3S (%)
- THD I1 (%)
- THD I2 (%)
- THD I3 (%)
- U1 - Ampiezza H3 (V)
- U1 - Ampiezza H4 (V)
- U1 - Ampiezza H5 (V)
- U1 - Ampiezza H6 (V)
- U1 - Ampiezza H7 (V)
- U1 - Ampiezza H8 (V)
- U1 - Ampiezza H9 (V)
- U1 - Ampiezza H10 (V)
- U1 - Ampiezza H11 (V)
- U1 - Ampiezza H12 (V)
- U1 - Ampiezza H13 (V)
- U1 - Ampiezza H14 (V)
- U1 - Ampiezza H15 (V)
- U1 - Ampiezza H16 (V)
- U1 - Ampiezza H17 (V)
- U1 - Ampiezza H18 (V)
- U1 - Ampiezza H19 (V)
- U1 - Ampiezza H20 (V)
- U1 - Ampiezza H21 (V)
- U1 - Ampiezza H22 (V)
- U1 - Ampiezza H23 (V)
- U1 - Ampiezza H24 (V)
- U1 - Ampiezza H25 (V)
- U1 - Ampiezza H26 (V)
- U1 - Ampiezza H27 (V)
- U1 - Ampiezza H28 (V)
- U1 - Ampiezza H29 (V)
- U1 - Ampiezza H30 (V)
- U1 - Ampiezza H31 (V)
- U1 - Ampiezza H32 (V)
- U1 - Ampiezza H33 (V)
- U1 - Ampiezza H34 (V)
- U1 - Ampiezza H35 (V)
- U1 - Ampiezza H36 (V)
- U1 - Ampiezza H37 (V)
- U1 - Ampiezza H38 (V)
- U1 - Ampiezza H39 (V)
- U1 - Ampiezza H40 (V)
- U1 - Ampiezza H41 (V)
- U1 - Ampiezza H42 (V)
- U1 - Ampiezza H43 (V)
- U1 - Ampiezza H44 (V)
- U1 - Ampiezza H45 (V)
- U1 - Ampiezza H46 (V)
- U1 - Ampiezza H47 (V)
- U1 - Ampiezza H48 (V)
- U1 - Ampiezza H49 (V)
- U1 - Ampiezza H50 (V)
- U1 - Ampiezza H51 (V)
- U1 - Ampiezza H52 (V)
- U1 - Ampiezza H53 (V)
- U1 - Ampiezza H54 (V)
- U1 - Ampiezza H55 (V)
- U1 - Ampiezza H56 (V)
- U1 - Ampiezza H57 (V)
- U1 - Ampiezza H58 (V)
- U1 - Ampiezza H59 (V)
- U1 - Ampiezza H60 (V)
- U1 - Ampiezza H61 (V)
- U1 - Ampiezza H62 (V)
- U1 - Ampiezza H63 (V)
- U1 - Ampiezza H64 (V)
- U1 - Ampiezza H65 (V)
- U1 - Ampiezza H66 (V)
- U1 - Ampiezza H67 (V)
- U1 - Ampiezza H68 (V)
- U1 - Ampiezza H69 (V)
- U1 - Ampiezza H70 (V)
- U1 - Ampiezza H71 (V)
- U1 - Ampiezza H72 (V)
- U1 - Ampiezza H73 (V)
- U1 - Ampiezza H74 (V)
- U1 - Ampiezza H75 (V)
- U1 - Ampiezza H76 (V)
- U1 - Ampiezza H77 (V)
- U1 - Ampiezza H78 (V)
- U1 - Ampiezza H79 (V)
- U1 - Ampiezza H80 (V)
- U1 - Ampiezza H81 (V)
- U1 - Ampiezza H82 (V)
- U1 - Ampiezza H83 (V)
- U1 - Ampiezza H84 (V)
- U1 - Ampiezza H85 (V)
- U1 - Ampiezza H86 (V)
- U1 - Ampiezza H87 (V)
- U1 - Ampiezza H88 (V)
- U1 - Ampiezza H89 (V)
- U1 - Ampiezza H90 (V)
- U1 - Ampiezza H91 (V)
- U1 - Ampiezza H92 (V)
- U1 - Ampiezza H93 (V)
- U1 - Ampiezza H94 (V)
- U1 - Ampiezza H95 (V)
- U1 - Ampiezza H96 (V)
- U1 - Ampiezza H97 (V)
- U1 - Ampiezza H98 (V)
- U1 - Ampiezza H99 (V)
- U1 - Ampiezza H100 (V)

FUNCTIONAL LOG

The instrument's memory is used also for other operative functions such as:

- Functional log for the recording of all the operations that alter the functioning of the instrument since the first use.
- Tariff Calendar file for the management of the tariffs and other files for memory configuration.

Considering the quantity and the complexity of the data contained in the memory, the memory management and the configuration of the services can be made exclusively via Ethernet port or Wi-Fi using FTP and HTTP commands, more simply by using Web pages and/or the software Energy Brain.

Kilo net

Power Quality Energy Analyzer & (Wi-Fi) Web Data Manager

Kilo net main features

The **Kilo net D6 Q**, in addition to the features of the Kilo D6 Q already included, is also a: **WEB Server** used for the configuration, via WEB Browser, of the Kilo Net and of the other devices in the sub-network. The HTTP communication can be used for the instantaneous readings and for accessing the memory logs. It is also an FTP server for file transmissions; **Modbus-TCP Server** acting as a bridge between the Ethernet network (Modbus-TCP protocol for the instantaneous measures) and the RS485 port; **Arbiter** function between the Ethernet port (or Wi-Fi), the eventual E-Wi wireless port (optional) and the expansion bus ExpBus (if other interfaces are used); Synchronization of the internal clock is made via NTP server; Static or dynamic IP address (DHCP protocol).

Kilo net log main features

The **Kilo net log** includes all the features of the Kilo net and in addition has ability to record the trend over time of the energy/environmental parameters retrieved by the Electrex devices (*called also channels*) connected in its RS485 port. The Kilo net log 8 manages 1 logging service (daily, weekly, monthly, yearly or else). The number of the devices which can be logged in each Log 8 service will depend on the number of parameters that will be logged. It is possible to use more Log 8 for the same service. Each service is defined from the same time resolution (sampling time). Example:

Kilo net D6 log 16: 2 storage services (2 x 8 channels) or 1 service of 16 channels.

Kilo net D6 log 24: 3 storage services (3 x 8 channels) or 2 where one service of 8 channels and the other of 16 channels or just a single service of 24 channels.

It is possible to activate up to a maximum of 8 Upgrade Log 8 services.



Wi-Fi

The Kilo net Wi-Fi (803.11 b) communicates with other devices using an existing Wi-Fi network.

NFC (Near Field Communication)

For mobile devices with NFC (Near Field Communication), such as some NFC smart phones, it is enough to position it closer to the Exa Net Wi-Fi D6 to enable the Wi-Fi communication without the need to enter the ID and password. This feature opens the possibility of creating specific APPs for mobile devices related to energy management.

Kilo net Coordinator D6 E-Wi HI

The **Kilo net Coordinator E-Wi** includes all the features of the Kilo net and in addition acts as the coordinator of the wireless network using E-Wi protocol and manages the data-logging (recording of trends over time) of the wireless E-Wi devices connected to it. The E-Wi devices use the E-Wi protocol based on IEEE 802.15.4 **and receive and transmit all data, without limitation**, at 250kbps, with a frequency of 2.4 GHz.

Additional functions activated via PUK code

It is possible to implement the following functions on the Kilo net and the Kilo net log ordering a PUK code to be inserted in a Web page for the activation.

Net upgrade Log 8(PUK)-PFSU940-01 (2 Already activated)

Enables 1 logging service (e.g. log of 8 instruments, power / energy just in import) on the Kilo net or Kilo net log.

Net upgrade WEB (PUK) - PFSU940-05

Enables the display of measures on web pages for each instrument connected to the RS485 port of the Kilo net / Kilo net Log.

Net upgrade WEB Open (PUK) - PFSU940-10

Adds to the Kilo net / Kilo net Log the ability to upload and display **custom Web pages**. The software implementation Net upgrade Web (PUK) code PFSU940-05 **must** be installed previously.

Net upgrade Mail Alarm (PUK) - PFSU940-15

Adds to the Kilo net / Kilo net Log the ability to send alarm emails and / or ModBus commands (e.g. to close a contact or edit a ModBus register).

Net upgrade Calendar (PUK) - PFSU940-20

Adds to the Kilo net / Kilo net Log ability to manage Energy Automation functions such as on / off switches, alarms / alerts and automatisms conditioned to events and / or an annual calendar configurable in minutes / hours / days / months.

Net upgrade Charts (PUK) - PFSU940-30


Allows to display on a web page daily charts of electricity, temperature, humidity, luminosity, etc. obtained from the files stored in the Kilo net log with the possibility to export to CSV files.

Net upgrade 4you (PUK)- PFSU940-25

Allows to modify an existing Log 8 service (the Log services to be modified must be already active and for modifying a Log 16 service are needed 2 PUK 4you) in the Kilo net log using a configurator that indicates the memory available. For example in order to run measurement campaigns.

Net upgrade New Features – PFSU940-40

Upgrade to new versions of the firmware of the Kilo Net adding new features.

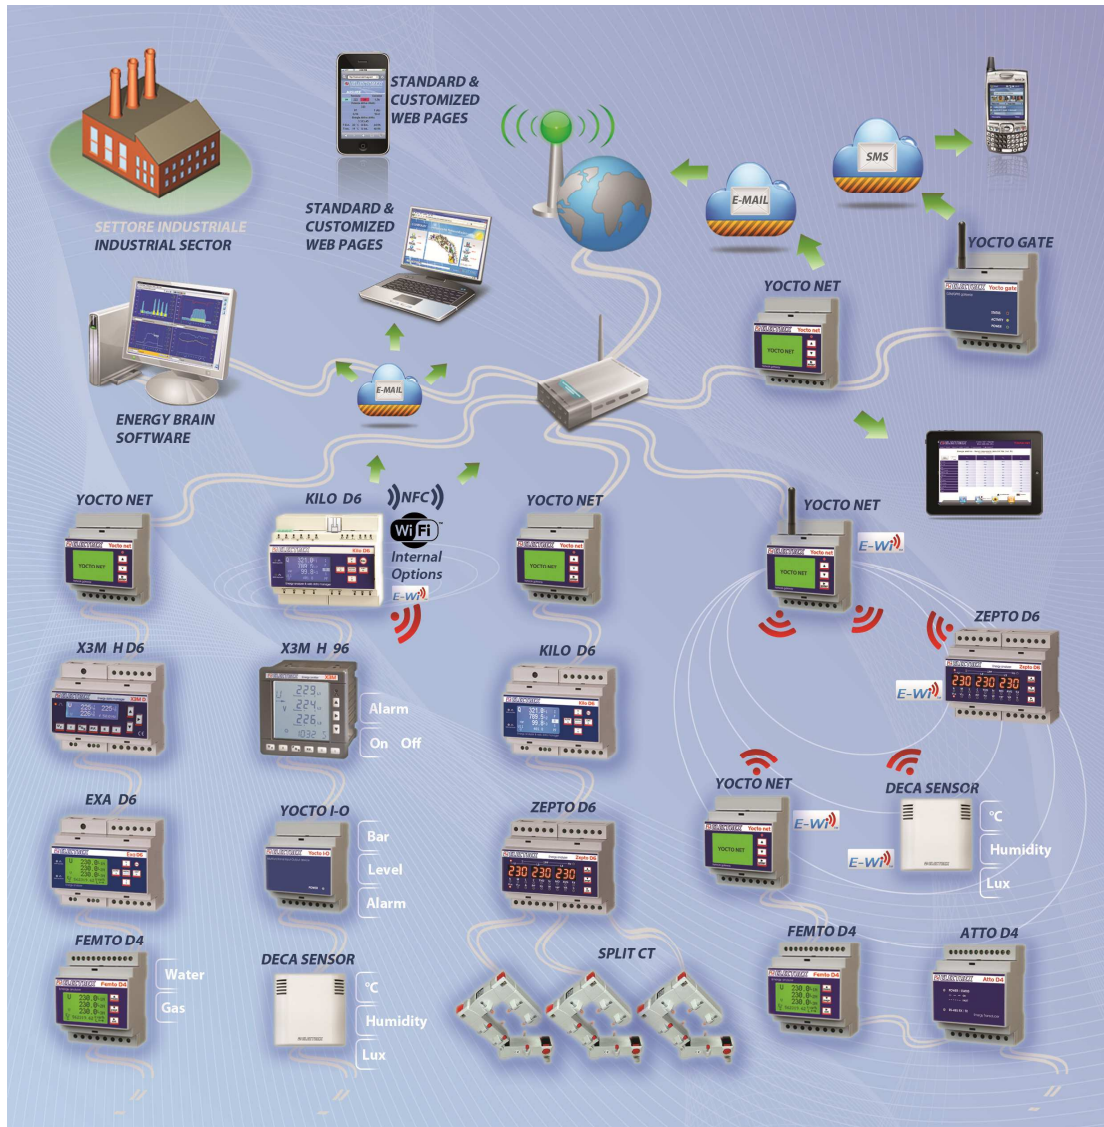

Production plant network example

In the diagram above represents a production plant powered by a main MV load and equipped with 3 MV/LV transformers (one of them replaced recently) which serve as many production lines, while the offices are powered by a LV system. The monitoring system consists of branch 1, 2 and 3 for monitoring the production lines while branch 4 controls the offices facility. The 4 branches are connect to the internal LAN Ethernet network via Yocto net (branches 1, 2, 3) and the Kilo net (branch 2 connected via Wi-Fi). The various instruments and sensors connected in the 4 branches monitor and control the main loads related.

- In branch 1 the X3M D6 H is placed after the Trafo 1 in order to monitor the quantity and quality of the energy consumed, while the Exa D6 MID is used to monitor the energy used in a galvanic process for tax deduction purposes; the Femto D4 instead covers the Test Lab facility where are monitored also the water and gas consumptions of the devices tested.
- In branch 2, the Kilo net in addition to the monitoring of the Trafo 2 load serves also as a gateway for: the X3M 96 H retrieving the data of an energy-consuming machine; for the Yocto I-O where are connected some process sensors; and for the Deca Sensor which monitors the environmental parameters for areas where even a single temp. degree makes a great difference in energy costs. (Note: in order to log the Deca Sensor, which has not a built in memory, the PUK 'Net upgrade Log 8' must be activated on the Kilo net and therefore activate a Log service). For the Kilo net there


are different logging services (daily, weekly, monthly, yearly). In our example it is used a daily logging service which can store the energy counters, of up to 8 devices, for 60 days with a sampling time of 15 min.

- In branch 3, containing already Electrex devices connected to the Yocto net gateway, has been added a Kilo D6 monitoring Trafo 3 and replacing a Zepto D6 used for monitoring another machinery.
- In branch 4, controlling the offices, there are different devices communicating via E-Wi protocol with the Yocto net coordinator E-Wi which is connected to the company's LAN Ethernet network.

The network contains also an Yocto net master with e-mail alarms option for alerting the maintenance team in case of anomalies and customized Web pages for supervision that can be displayed from any PC, tablet or smart-phone of the facility managers.

The Energy Manager can use its PC both within (locally) and outside the production plant (remotely) in order to monitor and evaluate the efficacy of the energy efficiency actions using the data (downloaded periodically from the Electrex devices) and managed by the software Energy Brain.


Examples of standard web pages – PFSU940-05

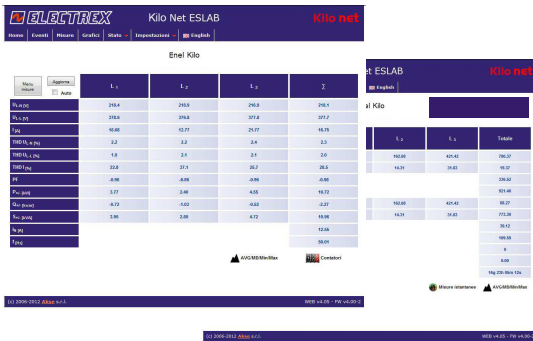

Enabling the 'Net upgrade WEB' functionality it is possible to view the standard web pages displaying real-time measurements, the average values and the energy counters both of the internal instrument and of every instrument connected in the RS485 sub-network to the Kilo Net. In the example on the side are shown the web page with the instantaneous measurements and below the one with the average values of power and the energy counters of a Kilo Net D6 which measures the general supply of a R&D lab with offices


Examples of custom web pages – PFSU940-10

Enabling the 'Net upgrade WEB' and the 'Net upgrade WEB open' functionalities it is possible to activate a memory part in the memory of the Kilo Net where can be uploaded custom web pages. Alongside are reported an example of real time monitoring of the electricity, gas and water of a production plant with the possibility of setting thresholds and alarms. The main page is linked to second level pages for more details on each load/monitoring point. The pages residing on the web server of the Kilo Net are easily accessible from any the browser of a PC, Smartphone, etc., typing just the IP address and password.

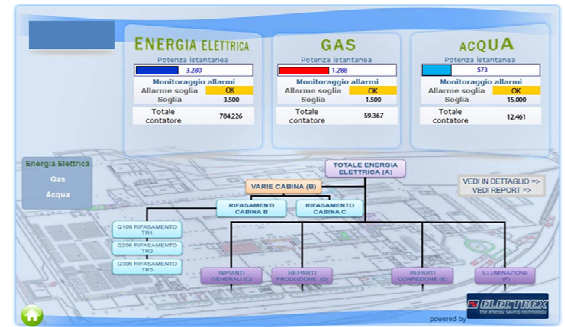


E-mail alarms examples – PFSU940-15

Enabling the 'Net upgrade email alarm' you can configure the Exa Net to send emails and / or commands (On / Off, change ModBus registers, etc.) in the case where one or more instruments in the sub-network have exceeded the thresholds set. The example shows the alarm e-mail of a department in a bakery and a graphical display in the specific web page of Kilo Net.

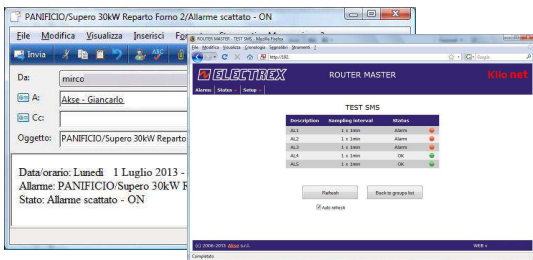



Calendar event example – PFSU940-20

Enabling the 'Net upgrade Calendar' option in the Kilo Net it is possible to manage Energy Automation tasks such as on / off switches, alarms / alerts and automatisms conditioned to events and / or an annual calendar configurable in minutes / hours / days / months which may be conditioned to the occurrence of various events detected by Electrex instruments in the sub-network. The astronomical clock is synchronized via NTP (references from the Internet or from a PC on the internal network) and the configuration of the time-zone enables you to identify the sunrise, the sunset and the Christian Easter Monday. You can manage up to 32 Events / Calendars different that you can match a Modbus command for ON-OFF

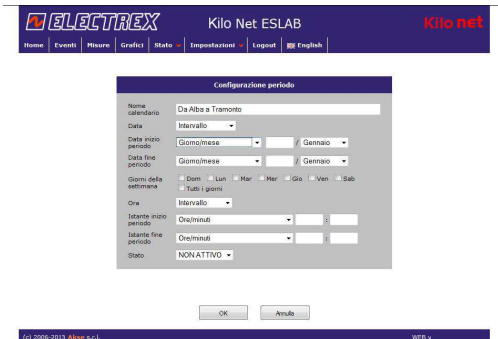

Web charts examples – PFSU940-30

Enabling the 'Net upgrade Charts' option in the Kilo Net log it is possible to display on a web page, charts obtained from the files stored in the same Kilo Net log with the possibility to export to CSV files. In the examples, the first chart shows the load profile for each 15 min. of active energy produced and consumed from PV system. While in the second one is displayed the gas consumption and ambient temperature profiles.

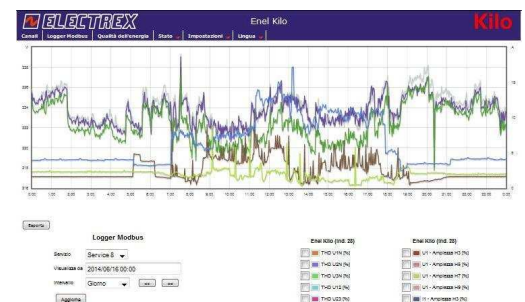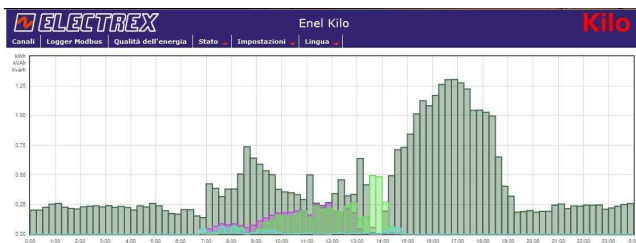

Measurement campaign example – PFSU940-25

Enabling the 'Net upgrade 4you' option related to an existing Log 8 logging service of the Kilo net log it is possible to implement measurement campaigns for any parameter retrieved from Electrex devices connect to the Kilo net Log and with any sampling frequency. In the example it is shown the measures campaign for the 3 phase-currents and 3 phase-voltages logged every 2 minutes.

The Energy Brain software installed on a PC (separate option)


Energy Brain software developed for the establishment of networks of instruments, including very complex ones, both locally or remotely.

It is suitable for applications with all the Electrex instruments equipped with a communication port, and provides all the necessary functions for monitoring and accurate management of energy efficiency (consumption / production of electricity, gas, water, etc.), environmental parameters (temperature, humidity, luminosity, CO2, etc.) and process parameters.



Connections between PC and Exa Net

direct Ethernet Rj45 port, Wi-Fi, Ethernet network, Internet

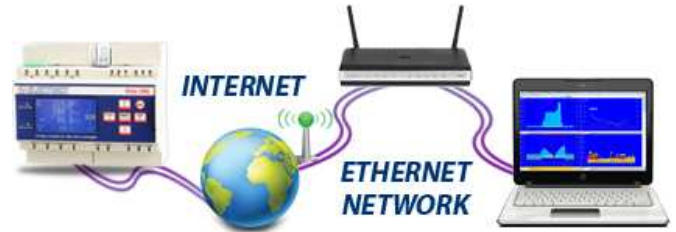

Main functions


Configuration

- The available options allow for maximum flexibility in adapting the software to the network instruments (even to different types of networks connected simultaneously) and the operator needs.
 - Remote set-up of the devices (CT, alarms, etc.)
 - Network configuration (per each device, per each client, per groups, per locations) with individual setting of the local connection (direct RS485, E-Wi, Ethernet) or remote (Internet, Wi-Fi) and of the communication parameters (speed, etc.).
 - Configuration of scheduled downloading specific for each location and customer, on a daily, weekly or monthly basis through a programmable agenda.



Load chart and curves of consumption/production

- Charts of the daily, weekly, monthly, yearly power curves.
- Charts of the daily, weekly, monthly, yearly consumption curves.
- Charts of powers, power peaks and energy per each tariff.
- Up to 4 simultaneous charts.
- Zoom and selection of measures functions.
- Numerical and graphical data print.




Parameters displaying

- Displays on-line all the measures provided by each of the instruments on the field




Data archive

- Automatic or manual download of the data of power, energy and other variables from the devices connected and automatic archiving in the internal database (Access®, PostgresSQL® or MySQL®).
- Export data to other DB via ODBC module or .txt or .xls format files.



Tariffs

- Management of the data per each tariff
- Configuration Editor for tariffs and calendars



Virtual and Multiple Channels

- Creating virtual channels, so of "groups" of instruments (e.g. "summation" of various departments) and display those, on graphical form, in the same way of a physical channel
- Creation of multiple channels in order to view curves of more instruments in the same chart for a quick comparison.
- Inclusion of variables and mathematical formulas, even highly complex ones, particularly useful, for example, to perform simulations.

Other types of Energies / Measurements


- Creating charts of data obtained from Electrex Deca Sensors and / or third party transducers with pulse output (e.g. luminosity, temperature, gas, calories, etc.).

Specific functions for Kilo D6

- Downloads, logs and displays the events recorded in the internal memory of the Kilo D6 in compliance with EN 50160 and EN 61000-4-30.

Graphic display of the instantaneous measures

- Manages the charts for the Kilo D6 devices.

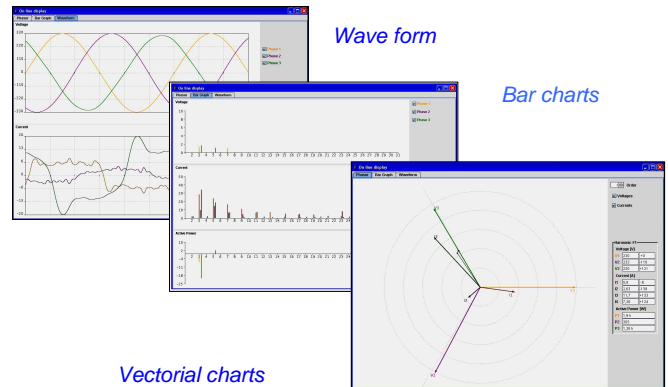

Harmonics measurement campaign and other parameters

- It is possible to configure a measurement campaign, e.g. with a sampling frequency of 2 min. and date/time stamp for different parameters, for a period of 10 days.



Energy Brain software is expandable and it is available in different versions according to the functions and the number of channels required.
For more details about the www.electrex.it/en software: www.electrex.it/en

How to order and versions of Kilo and Kilo net

Table for the coding of Kilo and Kilo net

Type	Code
Kilo D6 Versions:	
Kilo D6 RJ45 85÷265V 1DI 2DO.....	PFAK617-19
<i>For the coding of the different possible versions (can be equipped with 1 module) refer to the table* beside.</i>	
Kilo D6 Q Versions:	
Kilo D6 Q RJ45 85÷265V 1DI 2DO	PFAK6Q7-19
<i>For the coding of the different possible versions (can be equipped with 1 module) refer to the table* beside.</i>	
ExpBus Module D2 Versions (2 DIN Rail modules):	
ExpBus Module D2 24VDC 4DI 4DO	PFAK6Q5-19
ExpBus Module D2 24VDC 2DI 2DO 2AO4-20mA.....	PFAK6Q5-191
<i>Possible hardware combinations with 1 or 2 modules (of which, however, only one of the two types can be self powered, therefore only one for 1DI 2DO Self-Powered or 2AO4-20mA or 2DI 1RO Self Powered). For the coding of the different possible versions refer to the tables* beside.</i>	
Requires external 24Vdc power supply:	
Switching Power Supply D1 24VDC 400mA.....	PFTP100-Q2
ExpBus Module D4 Versions (2 DIN Rail modules):	
ExpBus Module D4 230-240V 4DI 4DO	PFAK6Q5-191
ExpBus Module D4 230-240V 2DI 2DO 2AO4-20mA.....	PFAK6Q5-191
<i>Possible hardware combinations with 1 or 2 modules also self-powered versions. For the coding of the different possible versions refer to the tables* beside.</i>	
<i>Internal 230Vac power supply, other power supply versions on request.</i>	
Kilo net D6 Q or Kilo net Wi-Fi D6 Q Versions:	
Kilo net D6 Q Web 85÷265V 1DI 2DO	PFAK6Q5-191
Kilo net D6 Q FULL 85÷265V 1DI 2DO	PFAK6Q5119F
Kilo net Wi-Fi D6 Q Web 85÷265V 1DI2DO ..	PFAK6QW-191
Kilo net Wi-Fi D6 Q FULL 85÷265V 1DI 2DO	PFAK6QW119F
<i>For the coding of the different possible versions of the Exa Net (can be equipped with 1 module * and / or Web functionalities ** and / or Log 8 ***) refer to the tables* beside.</i>	
<i>All the hardware and upgrade (PUK) combinations mentioned above are available also for the Kilo F (version suitable for the Electrex flexible CT) which's initial part of the code will become PFAF</i>	
Electrex flexible CT:	
FCTS 040-500 TA apribile Flessibile	PFCF005
FCTS 100-1000 TA apribile Flessibile	PFCF002
FCTS 200-2000 TA apribile Flessibile	PFCF003
FCTS 280-4000 TA apribile Flessibile	PFCF004
<i>The Kilo net can implement additional functions activating the following Net upgrade (PUK):</i>	
Net Upgrade Log 8 (PUK).....	PFSU940-01
Net Upgrade Web (PUK)	PFSU940-05
Net Upgrade Web Open (PUK).....	PFSU940-10
Net Upgrade Mail Alarm (PUK).....	PFSU940-15
Net Upgrade Calendar (PUK)	PFSU940-20
Net Upgrade Bundle Mail Alarm, Calendar (PUK)	PFSU940-21
Net Upgrade 4You (PUK)	PFSU940-25
Net Upgrade Charts (PUK)	PFSU940-30
Net Upgr. Bundle Web, Log 8, Mail, Calendar, Charts (PUK)	PFSU940-31

Type	Code
<ul style="list-style-type: none"> * Table for the Kilo, ExpBus Module, Kilo net versions (in order to define the type of internal module) For the construction of the product code insert the number / letter of the internal module needed as the 9th character for the Kilo e Kilo net (while for the ExpBus Module also as the 11th character for the eventual second module): Example for Kilo 1DI 2DO : PFAK617-19 Example for ExpBus Module D2 2DI 2DO 2AO4-20mA: PFAK6Q5-191 Example for Kilo net Web 1DI 2DO : PFAK6Q5-191 	
Versions differing on the internal module/Character per code:	
No module	0
Module 1DI 2DO	1
Module 2DI 1 RO Self Powered	2
Module 2RO	5
Module 2AO4-20mA	6
Module 1DI 2DO Self Powered.....	E
Module E-Wi	L
Module 4DI	N
Module 4DO	P
Module 2DI 2DO	Q
Module 4AI	R
Module I2C	T
<ul style="list-style-type: none"> ** Table for versions of Kilo net (in order to define the type of the Web functionality) For the construction of the product code insert the number / letter of Web functionality needed as the 11th character: Example for Kilo net Web 1DI 2DO : PFAK6Q5-191 	
Versions differing on Web functionality /Character per code:	
No Web functionality.....	0
Functionality Web	1
Functionality Web open	2
Functionality Mail alarm	3
Functionality Calendar	4
Functionality Mail alarm Calendar.....	5
Functionality Charts	6
Functionality Web Mail alarm.....	7
Functionality Web Calendar.....	8
Functionality Web Mail alarm Calendar Charts	A
Functionality Web open Mail alarm Calendar	B
Functionality Web open Charts.....	C
Functionality Web open Mail alarm Calendar Charts.....	D
<ul style="list-style-type: none"> *** Table for versions of Kilo net (in order to define how many Log 8). For the construction of the product code insert the number / letter of the amount of Log 8 needed as the 8th character (instead of the dash): Example for Kilo net Web Log 8 1DI 2DO: PFAK6Q51191 	
Versions differing on Log 8 number: Character per code:	
From Log 24 a Log 128 (multiples of 8)	from 3 - to G

Distributor