

# NORISYS 4 CPU High-Performance Control System



- Robust design for harsh environments
- 32-bit, 400 MHz embedded Power PC
- Integrated web-server
- 2 separate CANbus interfaces
- 2 separate Ethernet interfaces
- 1 RS-232/-422/-485 interface
- 1 NORISYS ExtensionBus interface, RS-485
- 1 USB 1.1 host
- 1 SD(HC) card slot for cards with a capacity of up to 32 GB
- 4 galvanically isolated digital inputs with wire break detection
- 4 potential-free changeover relay outputs
- Extended operating temperature range of -25°C ... +70°C
- PLC according to IEC 61131 standard with CoDeSys integration



**ClassNK**  
NIPPON KAIJI KYOKAI



Germanischer Lloyd

NORISYS 4 CPU N4C...

## NORISYS 4 CPU N4C...

### General Information

NORISYS 4 is an integrated, open and easy-to-use automation platform, which has been designed to reduce the engineering workload and which guarantees a high level of safety. The platform is scalable up to high-level automation applications, with added values and benefits, e. g. web server integration and software parameterisable I/O unit architecture.

### Description

The NORISYS 4 CPU module serves as a processor and communication device within the context of the NORISYS 4 automation platform. The module consists of an embedded high performance Power PC processor with multithreading enabled CoDeSys runtime implementation.

The IPC version of the NORISYS 4 CPU elegantly combines what industry wants from a PLC with a level of PC technology performance that is suitable for harsh environments. Program data is stored on an internal 32 MB flash drive. The remaining free space is available for user and project-related data. A separate SRAM module featuring battery backup contains a 128 kB retentive data area. Both the SD(HC) drive and the USB interface can be used for data storage.

Galvanically isolated digital inputs and changeover relay outputs can be used for process interconnection or PLC status output.

Every digital channel and all the communication interfaces are equipped with indicator LEDs for status monitoring. 2.5 mm<sup>2</sup> terminal blocks are used for direct wiring of standard industrial signal cables.

### System Interconnection

The CPU module is equipped with redundant CANbus and redundant Ethernet interfaces for field bus interconnection and vertical network integration. The CANbus interfaces support user-defined protocols and CANopen communication. Not only that, but there is a freely programmable RS-232/-422/-485 interface that can be used with existing MoDBUS RTU implementation and user-defined protocols for the purpose of interconnecting third-party systems.

The internal NORISYS 4 ExtensionBus is based on an RS-485 interface with an adapted MoDBUS RTU protocol for extension module interconnection. Thanks to the efficient way in which the protocol has been implemented, the I/O data can be updated for 500 channels in less than 250 ms. Each CPU module can be extended using up to 16 I/O modules. The hot-swap functionality and runtime I/O configuration mean that the control system has a high level of availability. All interfaces are short-circuit proof and feature 24 V protection.

### Web Interface

The CPU module contains a web server, which is able to drive the XML-based CoDeSys Web Visualization. Consequently, a web browser with the JAVA runtime system is merely requested on the user side. FTP connections to the internal flash as well to the SD(HC) drive and USB interface complete the set of available remote access options.

### Data Logger



The CPU module comes with a card drive for standard SD/SD(HC) cards of up to 32 GB. A basic data logger system for event and cyclic data can be set up using standard CoDeSys file access functions or the NORISYS secure file library, which supports secure data transfer combined with a data consistency check.

## Technical Data

Series N4C...			
Connection	Supply voltage	$U_{nom} = 24 V_{DC}, 18 \dots 32 V_{DC}$ , galvanically isolated	
	Current consumption	Max. 420 mA @ 24 $V_{DC}$	
	Reverse voltage protection	Integrated	
	Over voltage protection	Integrated	
Interfaces	RS-485	1 x, NORISYS extension bus, galvanically isolated	
	CANbus	2 x system bus, galvanically isolated	
	RS-232/-422/-485	1 x, galvanically isolated; Protocol: MODBUS-RTU	
	Ethernet	2 x 100 Base-TX/10Base-T; Protocol: TCP/IP, MODBUS-TCP	
	USB	1 x USB 1.1 Host	
	SD(HC)-drive	1 x card drive, max. 32 GB	
Electrical connections	Plug with spring-type terminals, cable 2.5 mm <sup>2</sup> , RJ-45, D-Sub9 male plug		
In-/Output	Inputs	4 channels, galvanically isolated, therefrom 2 counter inputs, wire break detection	
	Outputs	4 channels, relay changeover	
Environmental influences	Operating temperature	DIN IEC 60068-2-2 and DIN IEC 60068-2-1: -25°C ... +70°C	
	Climatic test	IEC 60068-2-30 Db	
	Storage temperature	DIN IEC 60068-2: -40°C ... +85°C	
	Vibration resistance	For bolt screw strap enclosure:	DIN IEC 60068-2-6 Fc: ±1.6 mm @ 2 ... 25 Hz, ±4 g @ 25 ... 100 Hz
		For mounting rail enclosure:	DIN IEC 60068-2-6 Fc: ±1.0 mm @ 2...13.2 Hz, ±0.7 g @ 13.2...100 Hz
	Shock resistance	DIN IEC 60068: 15 g/11 ms	
	Degree of protection	DIN EN 60529: IP30	
	ESD	IEC 61000-4-2: ± 6 kV/CD; ± 8 kV/AD	
HF-interference immunity	IEC 61000-6-2; IEC 61000-4-3, -4-4, -4-5, -4-6		
Interference emission	IEC 61000-6-4; CISPR16-1, CISPR16-2, EMC 2, EMC 1 with external filter		
Mech. dimensions	Material	Enclosure: transparent passivated aluminium	
	Mounting	Bolt screw strap; 35 mm mounting rail	
	Installation position	Preferably horizontal	
	Weight	350 g	
Other	Processor	embedded PPC, 32 Bit, 400 MHz, 760 MIPS	
	Program memory code/global/marker	8 MB/4 MB/1 MB	
	Memory retentive data	128 kB on battery supported SRAM	
	Cycle time for 1k Bit-instructions	< 0.05 ms	
Appl.	Approvals	CE, ABS, BV, DNV, GL, LR, NK	
	Applied standards	EN 61131-2 and EN 61131-3	

## Dimensions, Connection, Diagram

Top-hat channel TS35 to DIN EN 50022 / Rail mounting

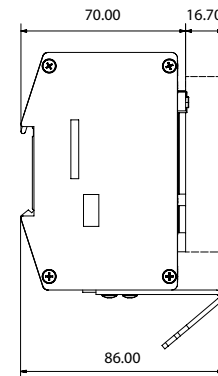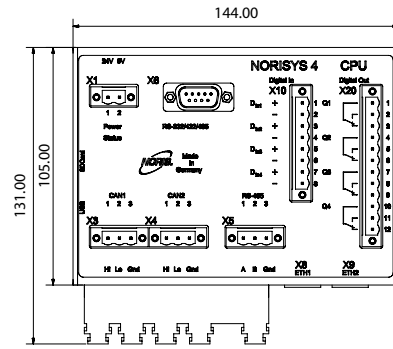

## Flange mounting

